


D-Seal Paving Cap Installation

D-SEAL D250, D275, D350, D375

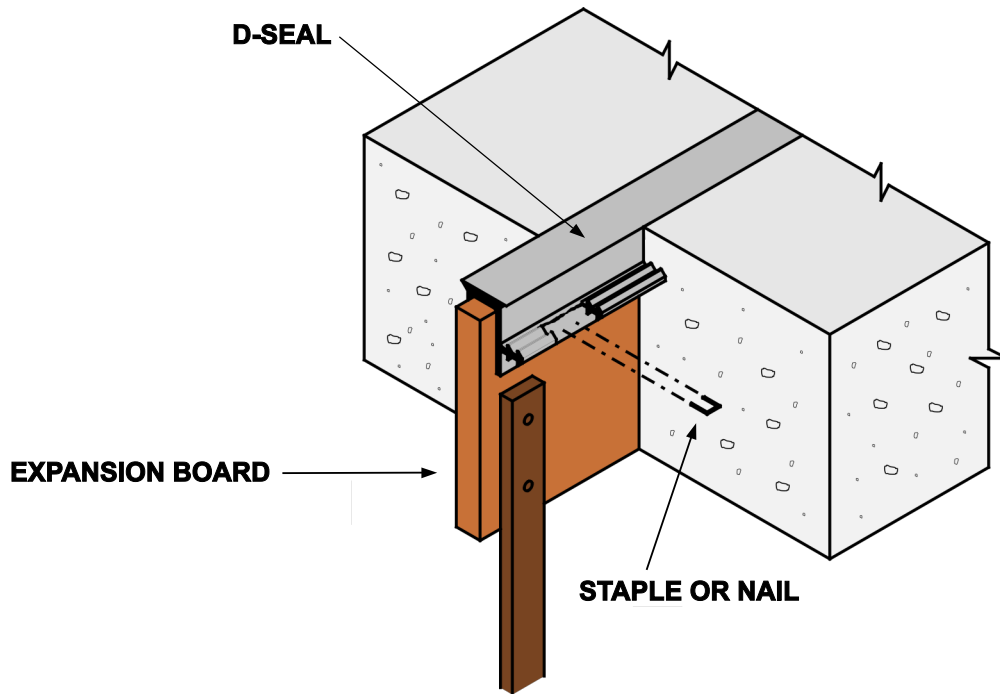

1. Fasten expansion board to stakes below the top of the board equidistance the depth of the D-Seal profile plus 1/4".
2. Place D-Seal profile over expansion board.
3. Below the protruding ribs, fasten the D-Seal profile flat with staples, nails, or screws to the board.
4. The D-Seal profile should be fastened every 6" to 12" on center.
5. Pour the concrete using normal placement techniques and screed to the top of the D-Seal profile. Concrete should completely cover protruding ribs, and circumvent damage to D-Seal profile.
6. Vibrate concrete to ensure coverage of protruding ribs.

D250 1/2" x 2" x 50' Paving Cap
D275 3/4" x 2" x 50' Paving Cap

D350 1/2" x 3" x 10' Paving Cap
D375 3/4" x 3" x 10' Paving Cap

Made in America  U.S. Veteran Owned

Waterstop • Forming Accessories • Tilt-Up Accessories • Prestressed Accessories • Rebar/Mesh Supports

DCA CONSTRUCTION PRODUCTS, LLC

10421 Industrial Dr., Garrettsville, OH 44231 • (888) 833-8308 (Toll-Free) • Fax: (330) 527-2440

Email: sales@durajoint.com



durajoint.com